

PAPERLESS RECORDER

DATA SHEET

PHR

This is a paperless recorder that displays measured data on the LCD in real time and stores data in CompactFlash.

The type of input such as thermocouple, resistance bulb, D.C. voltage (current), etc. can be arbitrarily set to 18 channels at the maximum.

The data stored in CompactFlash can be regenerated on the screen, and the use of supplied support software allows the data to be regenerated on a PC screen.

The data recorded in ASCII format can be directly read in a spreadsheet such as Excel, which facilitates the processing on a PC. (The data recorded in binary format cannot be read in.)

FEATURES

1. Large capacity storage by CompactFlash

Measured data is periodically stored in CompactFlash. In case of 256 MB, for example, display files for about one year and a half (display refresh cycle 30 sec) can be taken up (in case of ASCII data format, 9 channels, maximum/minimum recording).

2. Quick search and display of past data

Data stored in CompactFlash can be displayed in succession by scrolling the screen.

3. Various display capability

Depending on the object of measurement, the most suitable display format can be selected from a variety of formats including bar graph display, trend display, digital display, etc.

4. PC support software supplied as standard

Loader software that enables easy display and change of set data and data viewer software that regenerates the data stored in CompactFlash are supplied as standard.

5. Compact size

160 (W) × 144 (H) × 185 (D) mm (Panel mounting), Compact and as light as about 1.5 kg (9-point input, without option).

6. 18-point recording (Option)

12 types of thermocouples, 2 types of resistance bulbs and DC voltage/current input can be recorded up to 18 points

7. Communication function (Option)

RS485 MODBUS communication is available.

8. LCD extinguishing function

Automatically extinguishes the LCD if nothing is operated for certain time. You can set the time after a lapse of which the LCD is extinguished via parameter "LCD extinguishing time". The settable range is 0 to 60 minutes. Setting at 0 minute overrides the function, whereby the LCD will never extinguish.

This function prevents the backlight life from shortening uselessly. During the extinguishment, the power consumption can be reduced.



9. Ethernet function (Option)

FTP, Web server, e-mail and MODBUS-TCP are available using 10Base-T.

SPECIFICATIONS

Input system

Number of input points: 9 points or 18 points (Can be selected at the time of purchase)

Input circuit: Input mutual isolation (See "Others" on page 4 for the withstand voltage)
Resistance bulb measured current: about 1 mA

Measuring cycles: 9 or 18 points....100ms cycles

Recording cycle: 1 second to 12 hours

Input types: Thermocouple, resistance bulb, DC voltage, and DC current (Shunt resistors are fitted in input terminals).

Note) Provide a shunt resistor (type: PHZP0101) separately.

Measuring range

Input types		Reference range
Thermocouple	B	400.0 to 1760.0°C
	R	0.0 to 1760.0°C
	S	0.0 to 1760.0°C
	K	-200.0 to 1370.0°C
	E	-200.0 to 800.0°C
	J	-200.0 to 1100.0°C
	T	-200.0 to 400.0°C
	N	0.0 to 1300.0°C
	W	0.0 to 1760.0°C
	L	-200.0 to 900.0°C
	U	-200.0 to 400.0°C
	PN	0.0 to 1300.0°C
Resistance bulb	JPt100	-200.0 to 600.0°C
	Pt100	-200.0 to 600.0°C
DC voltage	50mV	0.00 to 50.00mV
	500mV	0.0 to 500.0mV
	1-5V	1.000 to 5.000V
	0-5V	0.000 to 5.000V

Note) B, R, S, K, E, J, T, N: JIS C 1602, DIN IEC 584-1
W: 5%Re-26%Re - W (Hoskins Mfg. Co. USA)
L: Fe-Cu - Ni (DIN 43710)
U: Cu-Cu - Ni (DIN 43710)
PN: Platinum
JPt100: JIS C 1604-1989 (Old JIS Pt 100)
Pt100: JIS 1604, DIN IEC 751

Selection of input types:

By key operation on the front panel. Note that the same input type (thermocouple, resistance bulb, voltage) should be set every 2 channels. Refer to "Setting method of input types" for details.

Burn-out function:

Provided as standard for thermocouple and resistance bulb inputs. If the input has been open-circuited, the recording level swings over 100%.

Thermocouple burn-out current:

approx. 0.2 μ A

Input filter function:

Settable for each channel (primary delay filter)

Time constants are settable in the range from 0 to 900 sec.

Scaling function:

Possible by DC voltage (current) input

Scaling range: -32767 to 32767

Decimal position:

settable at any point

Unit symbol: Selectable out of 125 different units or 12 user units of up to 7 characters.

Subtraction function:

Subtraction between each channel is allowed.

Totalizing function:

The measured value of each channel can be totalized. Applicable to daily, monthly, annual or external input totalizing.

F value calculation function:

F value (extinction value of bacteria by sterilization by heating) can be calculated from the measured temperature by each channel.

F value and measured temperature can be displayed and recorded using 2 channels.

Square rooter function:

Square rooter can be performed against the input value per each channel.

Indication system

Indicator:

5.7" TFT color LCD (320 x 240 dots) with backlight, no contrast adjustment. On the LCD, certain picture elements remain lit or extinguished. On account of the nature inherent to LCD, the brightness may be non-uniform. But, such are not troubles.

Color of indication:

14 colors

Applicable language:

English, Japanese

Life of backlight:

50,000 hours in terms of total lighting time.
(Replace the backlight as a set of display unit. If the LCD extinguishing function is resorted to, the LCD can be used longer as much.)

Trend display:

Direction: vertical and horizontal

Number of channels: 10 or 4 channels per screen group. (Input: 18 points at the maximum).

Display refreshment cycles:

select from 1 second to 12 hours

Scale display or no-display can be selected.

Bar graph display:

Number of channels: 10 or 4 channels per screen group. (Input: 18 points at the maximum).

Display refreshment cycles: 1 second.

Analog meter display:

For 4 inputs per screen group. (input from 1 to 4). Display in bar graphs or in analog meters can be selected.

Display refresh cycle: 1 second

Digital display:

Number of channels: 10 or 4 channels per screen group. (Input: 18 points at the maximum).

Display refreshment cycles: 1 second.

Totalizing data display:

Number of channels: 10 or 4 channels per screen group. (Input: 18 points at the maximum)

Display refresh cycle: 1 second.

Event summary display:

Alarm summary and message summary can be displayed. The message occurrence information and message display can be switched.

Ethernet log display:

E-mail sending, FTP server log in/off and MODBUS TCP/IP communication start/stop can be displayed.

Parameter display/set:

Already-set Data Display and Set Change Display screen

TAG indication:

Number of characters to be displayed:

Up to 8 characters

Up to 8 characters (Note 1) at 10-channel display.

Up to 16 characters at 4 channel display.

Note 1: Up to 7 characters only can be displayed on certain screens.

Characters to be displayed:

Alphanumerics, hiraganas and katakanas.

Tag, unit and channel No. display:

Which can be displayed depends on the particular screen. Refer to the table below.

(Keywords only are extracted.)

Screen	Channnels per screen	Item			
		Tag 1	Tag 2	Unit	ch Np.
Trend	4 or less	+	+	+	+
	5 or more	x	-	x	x
Bar graph	4 or less	+	+	+	+
	5 or more	x	-	x	x
Analog meter	4 or less	All			
	5 or more	No. 1 to 4		All except tag 2	
		Others	x	-	x
Instantaneous value	4 or less	All			
	5 or more	All except tag 2			

x: 1 item only can be displayed

+: 2 items only can be displayed

-: Nothing can be displayed

Historical trend display:

Displays past recording data read from compact flash, currently recording data or just recorded data. The recording chart can be scrolled or, via time designation, the control can jump to an arbitrary recording chart.

Number of screen groups:

Four groups (Up to 10 channels per 1 group can be registered.)

Keyboard

No. of Keys: 8

Function: Use to select various screens and set various parameters.

Recording function

External memory media:

Compact Flash card
Format according to FAT16 or FAT. Otherwise, reading and saving are impossible.

Recording capacity:

512 MB maximum (compact flash). Limiting the recording file to 64 MB is recommended (for 112 hours if display refresh cycle is 1 second. See Table 1 (p. 5).) If impossible, up to 256 MB is tolerated. A file recorded beyond could not be opened.

* Only the Sandisk's compact flash is warranted. And please change the compact flash every six month to prevent the data losing.

Recording method:

Turning ON the REC key allows measured data to be written at fixed cycles.
Recorded as a new file whenever the recording starts.

Data save cycles:

Linked to the display refreshment cycles on the "Real Time Trend" screen. However, they are automatically set to about 1 minute if the refreshment cycles are set to less than 1 minute.

Trend data:

Measurement data sampled at measurement cycle is saved in terms of mean value, instantaneous value or maximum/minimum value.

Event data:

Saves alarm data and message data.
Further saves power ON and OFF, if any, after starting recording.

Totalizing value data:

Records the totalized data according to the totalizing type selected by channels. Values by totalizing types or total from the beginning of totalizing, whichever selected, can be recorded. For each channel, the input value totalizing, number of DI inputs or measurement at times when DI inputs have occurred can be selected. Input values to be totalized are selected from daily report, monthly report, yearly report and external input.
If power has been turned off and on while totalizing, the totalizing is resumed at last value. (Last value remains saved, but data

during power OFF is not totalized.)

Configuration data:

Configuration data can be saved. And this data can also download to recorder.

Storage capacity:

Approximately 1.5 years when the display refresh cycle is 30 seconds (in case of 9-channel recording in ASCII data format, and 256 MB compact flash used). Refer to Table 1.

Residual capacity of memory:

Indicates how much of the memory card has been used on the screen. If the residual capacity is none, the recording stops.

Compact flash:

Manufactured by SanDisk
URL: <http://www.sandisk.com>
Type: SDCFB-256-J60 (256MB)
Available at any PC shops

Data format:

Either of ASCII or binary format can be selected. (Switching cannot be made while the recording is in progress. In the case of ASCII format, the data can be directly read on Excel, etc.)

Note: The data recorded in binary format cannot be read directly.

Approximately 166 bytes per sampling for maximum/minimum recording of 9-channel input in ASCII format, or approximately 40 bytes for maximum/minimum recording of 9-channel input in binary format.

Alarm function

No. of settings: Up to 4 alarms for each channel are settable.

Type of alarm: High/Low limits

Indication: Status (alarm types) is displayed on digital display unit when an alarm occurs.
Historical display on alarm summary (Alarm start/cancel time and alarm types)

Hysteresis: Set within the recording range of 0 to 100%

Acts on high or low limit alarm, and does not affect the battery alarm nor memory full alarm.

Relay output: Number of points; 10 (option: Cannot be selected if the number of input points is 18.)

Transistor output (open collector output):

18 points (option)

Alarm latch function:

Holds alarm indication and alarm output even after measurement value has left the alarm range.

ON/OFF operation is performed according to key setting.

Power supply

Rated power voltage:

100 to 240V AC

Range of operating voltage:

90 to 264V AC

Supply frequency:

50/60Hz $\pm 2\%$ (both employable)

Power consumption

Power voltage	Consumption
100V AC	About 36VA
240V AC	About 47VA

Structure

Mounting method:

Panel-mounted (vertical panel) or portable (desktop type)

Thickness of panel:

2 to 26 mm

Materials: PC-ABS for case and bezel

Color: Black

External dimensions:

Panel-mounted: 160 (W) × 144 (H) × 185 (D) mm

Portable: 160 (W) × 179 (H) × 206.6 (D) mm

Mass: About 1.5 kg (9-point input, without option)

External terminal board:

Screw terminals (M3 thread)

Operating condition

Ambient temperature:

Panel-mounted(without Ethernet function): 0 to 50°C*1

Portable: 0 to 40°C

Panel mount (with Ethernet function): 0 to 40°C*2

Ambient humidity:

20 to 80% RH

Vibration: 10 to 60Hz 0.2m/s² or less

Shock: None

Magnetic field: 400 A/m or less

Signal source resistance:

Thermocouple input 1kohm or less
Resistance bulb input... 10ohm/wire or less (resistance of each wire of 3-wire system should be balanced).

Voltage input... 0.1% or less of input resistance

Mounting posture:

Forward tilt 0°, backward tilt within 30°, horizontal 0°

Warm-up time: One hour or more after power ON

*1: In case of the 12th digit of ordering code is "Y" or "R".

*2: In case of the 12th digit of ordering code is "E" or "W".

Reference standard

Accuracy/resolution:

Measuring conditions (23±2°C, 65±10% RH, power voltage, frequency fluctuation within ±1%, no external noise, warm-up time of 1 hour or more, vertical mounting, standard values of signal source resistance and wiring resistance... within 1%)

Input types		Digital indication accuracy Note 1	Digital indication resolution
Thermocouple	B R S K E J T N W L U PN	± (0.15%+1 digit) ±(0.3%+1 digit) for the range shown below Thermocouple B : 400 to 600°C Thermocouples R and S : 0 to 300°C Thermocouples K, E, J, T, L and U : -200 to -100°C	0.1°C
	Resistance bulb	JPt100 Pt100 ± (0.15%+1 digit)	0.1°C
DC voltage	50mV	± (0.15%+1 digit)	10μV
	500mV		100μV
	5V		1mV

Note 1) Digital indication accuracy is a percentage (%) with respect to input range of 1 page.

Note 2) No error of reference contact compensation of thermocouple is included.

Error of reference contact compensation:

K, E, J, T, N, L, U, PN: ±0.5°C

R, S, B, W: ±1.0°C

(when measured at 0°C or more)

Max. input voltage:

Thermocouple, resistance bulb, dc voltage: ±10V DC (continuous)

Input impedance: Thermocouple, DC voltage:

About 1MΩ

(Approximately 100 kΩ when the power is set to OFF)

Others

Clock:

With calendar function (Christian era)

Accuracy: ±50 ppm or less (monthly error: about 2 minutes)

However, time error at power ON/OFF is not included.

Memory backup: Parameters are saved to the internal non-volatile flash memory.

The clock is backed up with built-in lithium battery.

Trend data is not backed up.

Insulation resistance:

100 Mohm (when measured between each terminal and ground by using a 500V DC megger)

Withstand voltage:

Input terminal – input terminal:

500 V AC, 1 min

Power terminal – ground: 2000V AC, 1 min

Input terminal – ground: 500V AC, 1 min

Alarm terminal (contact output) – ground:

2000 V AC, 1 min

Alarm terminal (contact output) – alarm terminal (contact output):

750 V AC, 1 min

Communication terminal – ground:

500 V AC, 1 min

Alarm terminal (open collector) – ground:

500 V AC, 1 min

Power terminal – input terminal:

500 V AC, 1 min

Effect on operation

Effect of power supply fluctuation conditions:

For the fluctuation in the range from 90 to 264V AC (frequency: 50/60Hz)
Reading change: $\pm(0.2\%+1 \text{ digit})$ or lower.
For the fluctuation in the range from 47 to 63Hz (power voltage: 100V AC)
Reading change: $\pm(0.2\%+1 \text{ digit})$ or lower.

Effect of input signal resistance:

Thermocouple input: $30\mu\text{V}\pm 1 \text{ digit per } 100\Omega$
DC voltage: Fluctuation for resistance value equivalent to 0.1% of the input resistance: $\pm(0.2\%+1 \text{ digit})$ or lower.
Resistance bulb (for wiring resistance of 10Ω for 1 line (the same for 3 lines))
Reading change: $\pm(0.2\%+1 \text{ digit})$ or lower.

Effect of ambient temperature:

Reading change: $\pm(0.3\%+1 \text{ digit})/10^\circ\text{C}$ or lower.

Effect of Mounting position:

For the backward 30° slant
Reading change: $\pm(0.2\%+1 \text{ digit})$ or lower.

Effect of vibration:

When sine wave of 10 to 60Hz with the acceleration of 0.2m/s^2 is applied in each direction for 2 hours.
Reading change: $\pm(0.2\%+1 \text{ digit})$ or lower.

Safety and EMC standard

Safety standard: Based on IEC61010-1

EMC standard: Based on EN61326

Transportation/storage conditions

Temperature: -10 to $+60^\circ\text{C}$
Humidity: 5 to 90%RH
Vibration: 10 to 60Hz, 2.45 m/s^2 or lower
Shock: 294m/s^2 or lower (packed state)

Additional function (option)

- **Alarm relay output/DI (11th digit of code symbols: "1")**
A card with 10-point relay output and 5-point DI input can be mounted.

Cannot be mounted if the number of input points is 18.

Terminal structure:

M3 screw terminal

Alarm relay output:

1a contact output (10 points),
Individual channel or common output (OR output) allowed.
DO1: Contact capacity; 150V/3A AC, 30V/3A DC (resistance load)
DO2-10: Contact capacity; 240V/3A AC, 30V/3A DC (resistance load)

DI input:

No-voltage contact input (5 points)
The following control is allowed by contact input.
(1) Recording start/stop
(2) Message set
(3) F value calculation reset
(4) Totalizing start/stop
(5) Totalized value reset
(6) LCD (backlight) lighting
(7) E-mail sending

- **Communication, alarm (open collector output), DI input (12 digit of code symbols is "R" or "W")**
RS485 communication. Card having 18 alarm points (open collector output) and 5 DI input points can be installed.

Terminal structure:

M3 thread terminal (DO11 (alarm open collector output), DI6, DIO source terminal and communication terminal)
D-Sub 25 pin female terminal (DO12 to DO28 (alarm open collector output)) and DI7 to DI10

Communication: Physical specifications: EIA RS485

Communication protocol:

Modbus (RTU)

Communication method:

2 wire method. Half duplex bit serial, start-stop sync type.

Data type:

8 bits. Parity: odd/even/none.

Stop bit: 1 bit.

Communication rate: 9600, 19200bps

Connection aspect:

multi-drop/up to 32 recorders connectable including master station

Communication distance:

Total extension 500m or less

RS232C/RS485 Signal converter (recommendation):

Isolated type

Manufacture: OMRON Corporation

Model: K3SC-10

Alarm output:

Open-collector transistor output (18 points)

Electrical Rate: 30Vdc, 100mA (resistance load)

DI input:

No-voltage contact input (5 points).

Contact input allows following controls.

- (1) Recording start/stop
- (2) Message set
- (3) F value calculation reset
- (4) Totalizing start/stop
- (5) Totalized value reset
- (6) LCD (backlight) lighting
- (7) E-mail sending

Ethernet (Option)

The following can be performed through the Ethernet function.

- **HTTP server (Internet Explorer 6 is available)** Note 1

Measurement display:

Digitally displays the measurement of each channel of the recorder and alarm occurrence status.

Event summary display:

Displays event summary including alarm ON/OFF and issuance of messages.

Main unit information display:

Displays memory use conditions and information on the main unit such as the battery end warning.

Integrated value display:

Digitally displays the integrated value of each channel of the recorder.

■ FTP server (Internet Explorer 6 available.) Note 1

File download: Record files stored in compact flash (CF) can be downloaded from the browser.

File delete: Record files stored in CF can be deleted from the browser.

Access authentication:

Authenticates access authority to FTP server.

■ SMTP (e-mail client)

Transmits e-mails to specified address under the following conditions.

- (1) When an alarm turns on or off
- (2) When DI is set to ON or OFF
- (3) When an error occurs to the main unit (such as low battery or no memory space)
- (4) At specified intervals

■ MODBUS TC/IP

Data read: Settings can be read through MODBUS TCP/IP communication.

Data write: Settings can be written through MODBUS TCP/IP communication.

Note1: Netscape isn't available.

Support software

Note:

- Applicable PC: PC/AT-compatible machine
- Operation on PC98-series machines by NEC is not guaranteed.
- Operation on self-made or shop-brand PCs is not guaranteed.

The following software is provided as standard.

■ Loader software for PC

Major function: Performs various parameter setting/change of the main unit

O/S: Windows 2000/XP

Required memory:

64MB or larger

Disk drive: Windows 2000/XP-capable CD-ROM

Hard disk capacity:

Free capacity of 30MB or larger required

Printer: Windows 2000/XP-capable printer and printer driver

Note) PC loader communication cable (type PHZP1801) is separately required.

■ Data viewer software

Major function: Regenerates the past trend record on the PC from the data in the compact flash. Provided with historical trend display and event display functions.

Data can be changed to CSV file.

O/S: Windows 2000/XP

Required memory:

64MB or larger

Disk drive: Windows 2000/XP-capable CD-ROM drive

Hard disk drive: Free capacity of 30MB or larger required

Printer: Windows 2000/XP-capable printer and printer driver

Standard functions

Function	Description
Record range voluntary setting	Recording range can be set by channel.
Input type setting	Input type can be set by channel. (Key operation on the front face) Set the same input type for every 2 channels.
Skip function	Skips arbitrary channel display/recording.
Trend display	Time display: Time is displayed at the top of the trend display screen. Alarm display: On occurrence of an alarm and the restoration, alarm is displayed in the alarm display field. The compact flash usage is displayed with a bargraph at the top.
TAG name display	By channel, Maximum of 8 characters.
Screen name display	Displays the screen name (maximum of 16 characters).
Unit creation	Industrial units can be arbitrarily created, Maximum of 7 digits, 12 types.
Scaling function	Arbitrary scaling is allowed in the case of DC voltage input. Decimal point position can also be arbitrarily set in the range from -32767 to 32767.
PV shift	Shift the zero point and slant of the reading.
Input filter	Prevents sudden fluctuation of input for each channel (primary delay filter). Time constant: 0 to 900 seconds.
Burnout function	Displays the break of thermocouple/resistance bulb input by scaling out to 100% side.
Historical trend display	Regenerates and displays the data stored in the compact flash by scrolling the screen. Displays data of a designated time.

Table 1. Recording capacity

The recording can be made for the period of time listed in the tables shown below under the following conditions.

- 9 input points
- Recording data format: ASCII
- Recording type: Maximum/minimum recording
- No alarm, nor message, nor other events.

CompactFlash size	64MB				
Display upgrade cycle	1 sec	10 sec	30 sec	1 min	10 min
Recordable capacity (about)	112 hours	46 days	140 days	280 days	7.7 years

CompactFlash size	256MB			
Display upgrade cycle	1 sec	10 sec	30 sec	1 min
Recordable capacity(about)	18 days	187 days	1.5 years	3 years

- When the number of input points is 18, the period is approximately one half of those listed in the table.
- In binary format, the period is approximately 4 times as long as those listed in the table.
- For recording type of mean or instantaneous value, the number of days is approximately 2 times as long.

When compact flash is not used, the capacity of the main unit is as follows:

Recorded data: for 400 data, Event data: for 180 data (1 sampling=1 data, irrespective of the number of channels, For 400 seconds at the refresh cycle of 1 second)

ORDERING CODE

			PHR												
			4	5	6	7	8	9	10	11	12	13			
				B	1	4	-		1				Y		
Digit	Specifications	Note													
4	<Number of input points> 9 channel 18 channel		↓ 1 2												
5	<Mounting> Panel mounting Portable (desktop)	Note 3		↓ 1 2											
6	<Case color> Black				↓ B										
7	<Compact flash> Without (not furnished)	Note 2				↓ 1									
8	<Version No.> Version No.						↓ 4								
9	<Display> Japanese English							↓ N E							
10	<Power supply> 100 to 240 V AC								↓ 1						
11	<Alarm (relay) output/DI input> Without With	Note 1								↓ 0 1					
12	<Communication, alarm (open collector) output/DI input> Without Communication (RS485), alarm output, Di input Ethernet Ethernet, communication (RS485), alarm output, Di input	Note 4 Note 5 Note 4,5										↓ Y R E W			
13	<Destination> General												↓ Y		

Note 1 : Cannot be selected if 2 is selected for the forth digit (the number of input points is 18).

Note 2 : The compact flash is optional. Refer to the section of "Optional items" below.

Note 3 : Portable mounting type doesn't comply with UL and CE.

Note 4 : Alarm output; transistor (open collector) output


Note 5 : Cannot be specified when "2" is selected for the 5th digit.

OPTIONAL ITEMS

Item	Code	Specification
Shunt resistor for DC current input	PHZP0101	10Ω ±0.1%
PC loader communication cable	PHZP1801	Length 3m with connector USB-A/USB miniB terminal *
CD-ROM with instruction manual and support software	PHZP0301	
Terminating resistor for communication	PHZP0701	100Ω
D-Sub light type 25 pin connector with male terminal for alarm output (without cable)	PHZP0801	
Transmission cable	PHZP0901 PHZP1001	For PHR to PC For PHR to PHR
PC card adapter	SDAD-38-J60	For compact flash
Compact flash	PHZP1301-064 PHZP1301-128 PHZP1301-256	64MB 128MB 256MB

* Shape of this cable is shown below

USB (A) Plug – USB (Mini-B) Plug




SCOPE OF DELIVERY

Item	Quantity	
	Panel mounting	Portable
Recorder (PHR)	1	1
Panel mounting bracket	2	—
CD-ROM PC support software instruction manual	1	1
Panel packing for the front face	1	—
Noise filter for the power supply	1	1
AC power cord (2m)	—	1

OUTLINE DIAGRAMS (Unit : mm)


PANEL MOUNTING TYPE

In the case of 9-point input

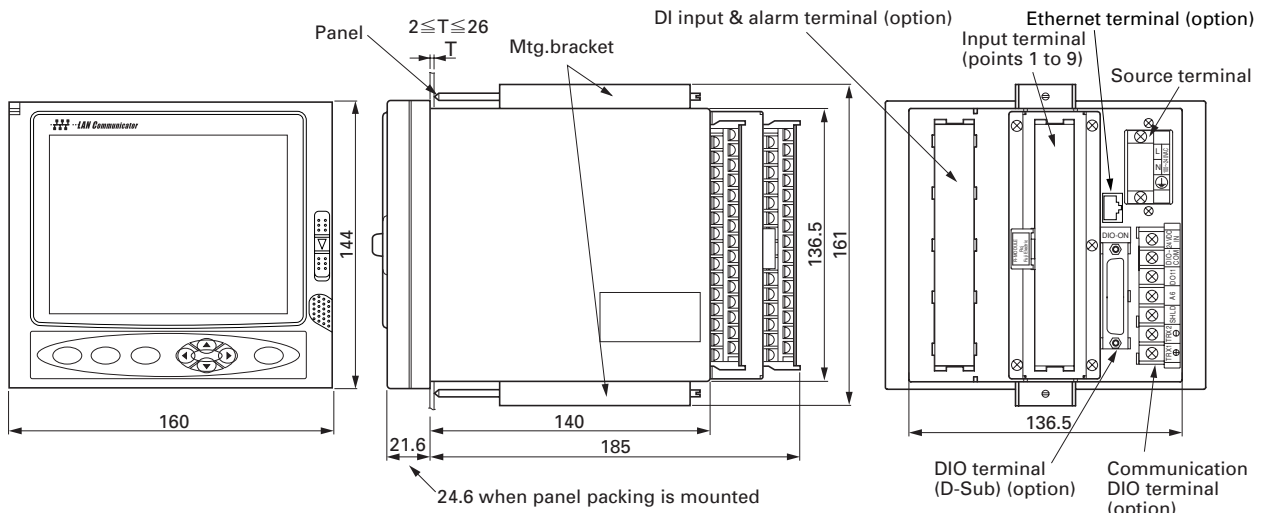


(Note) When placing the main unit on another instrument or on the floor, allow a space of 100mm or more between the unit and instrument or the floor.

In the case of 18-point input

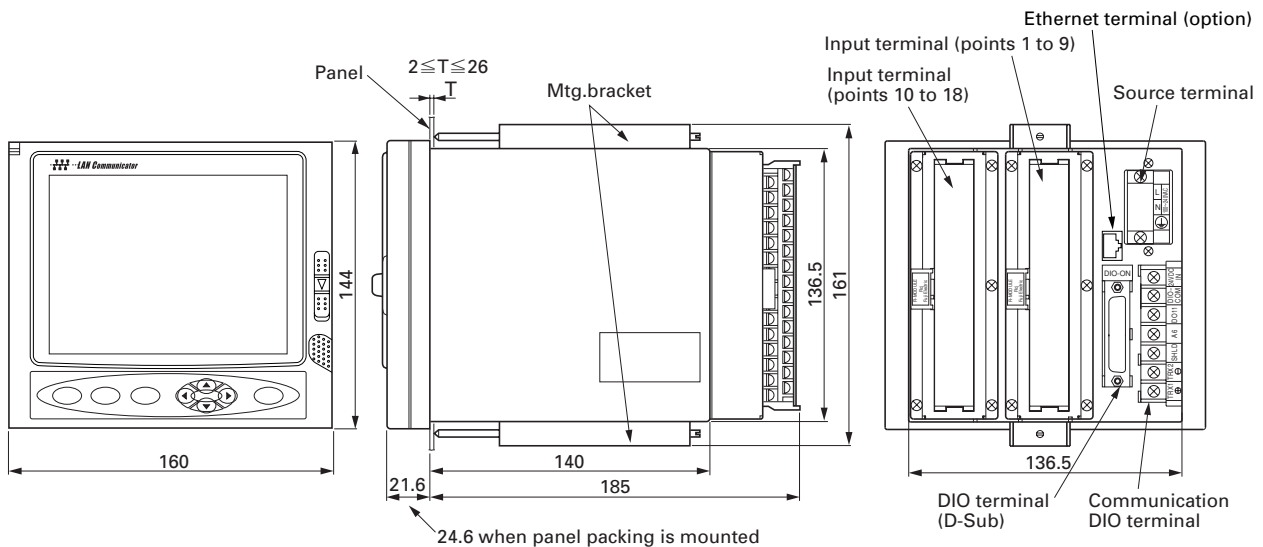

(Note) When placing the main unit on another instrument or on the floor, allow a space of 100mm or more between the unit and instrument or the floor.


PANEL CUTOUT

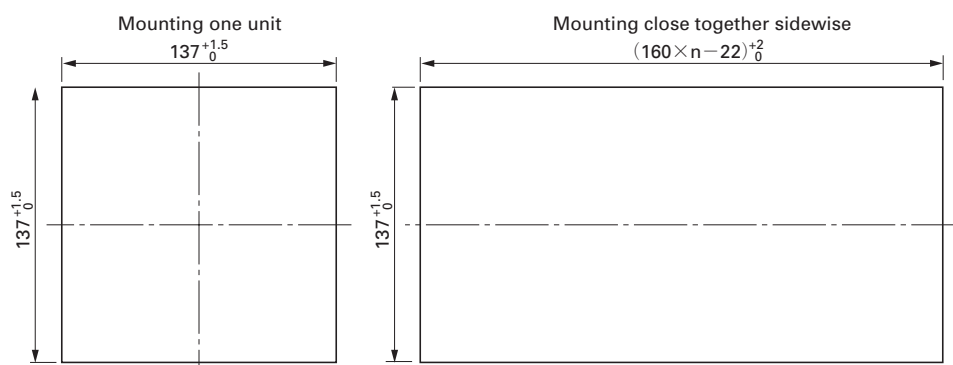

Do not use the water proof pacing in case of mounting n unit


PORTABLE (TABLE TOP) TYPE

In the case of 9-point input

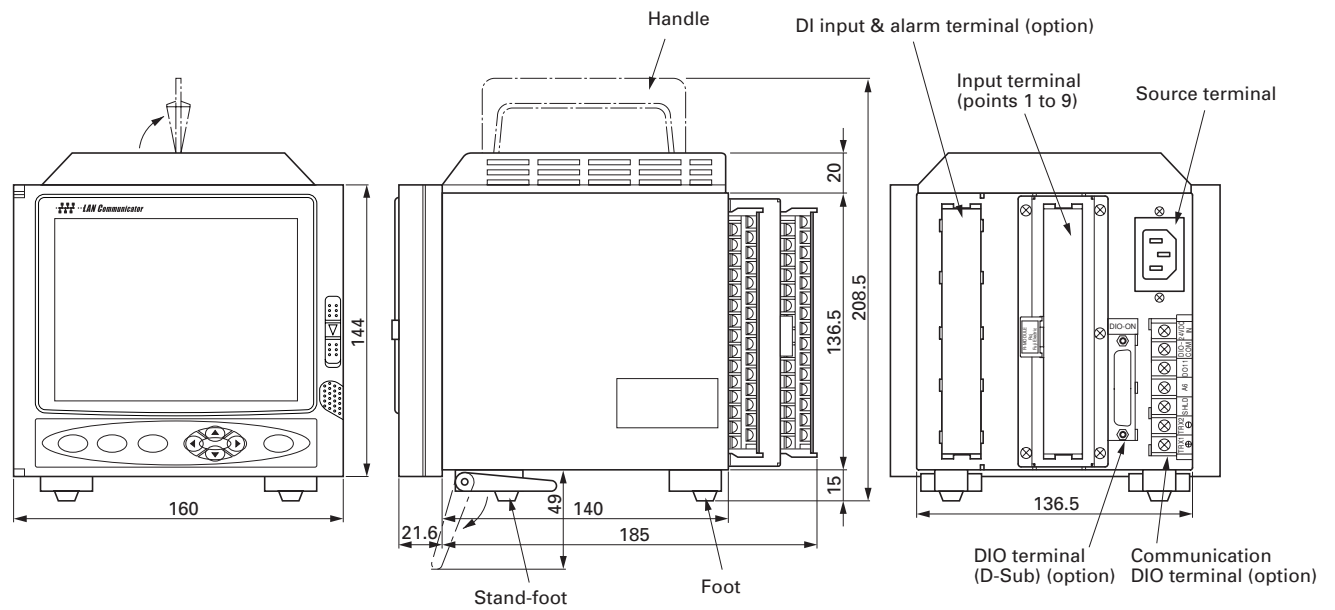

(Note) Please use the stand-foot upright.

In the case of 18-point input

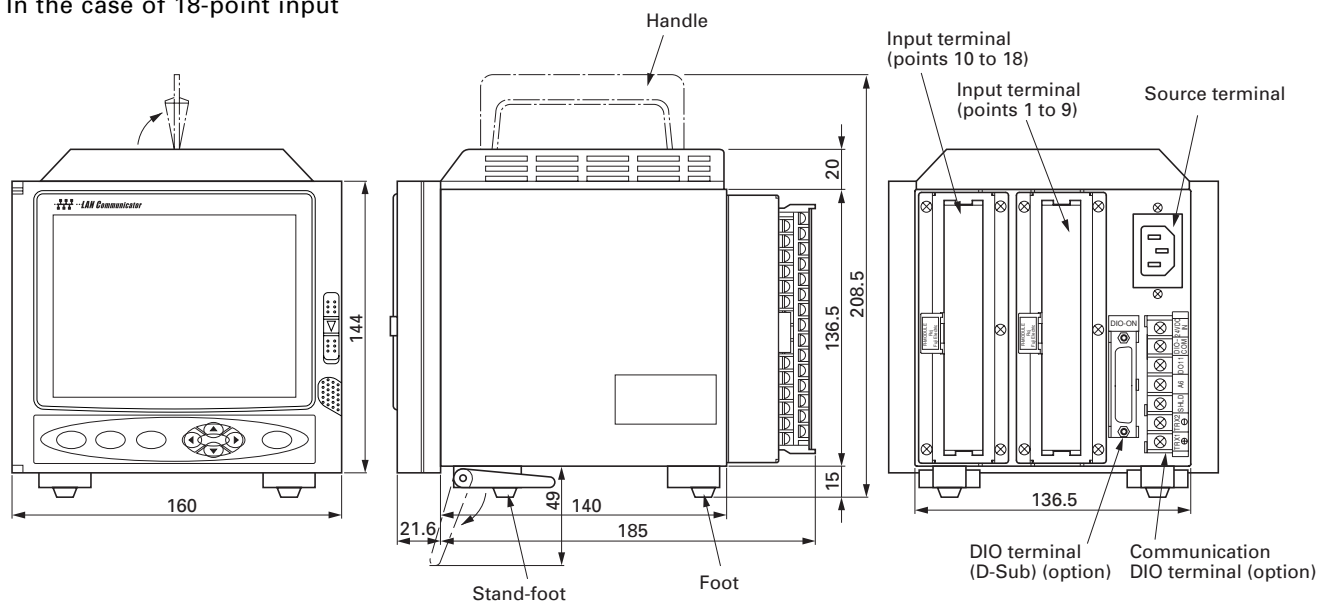


(Note) Please use the stand-foot upright.


EXTERNAL CONNECTION DIAGRAMS

PANEL MOUNTING TYPE

In the case of 9-point input

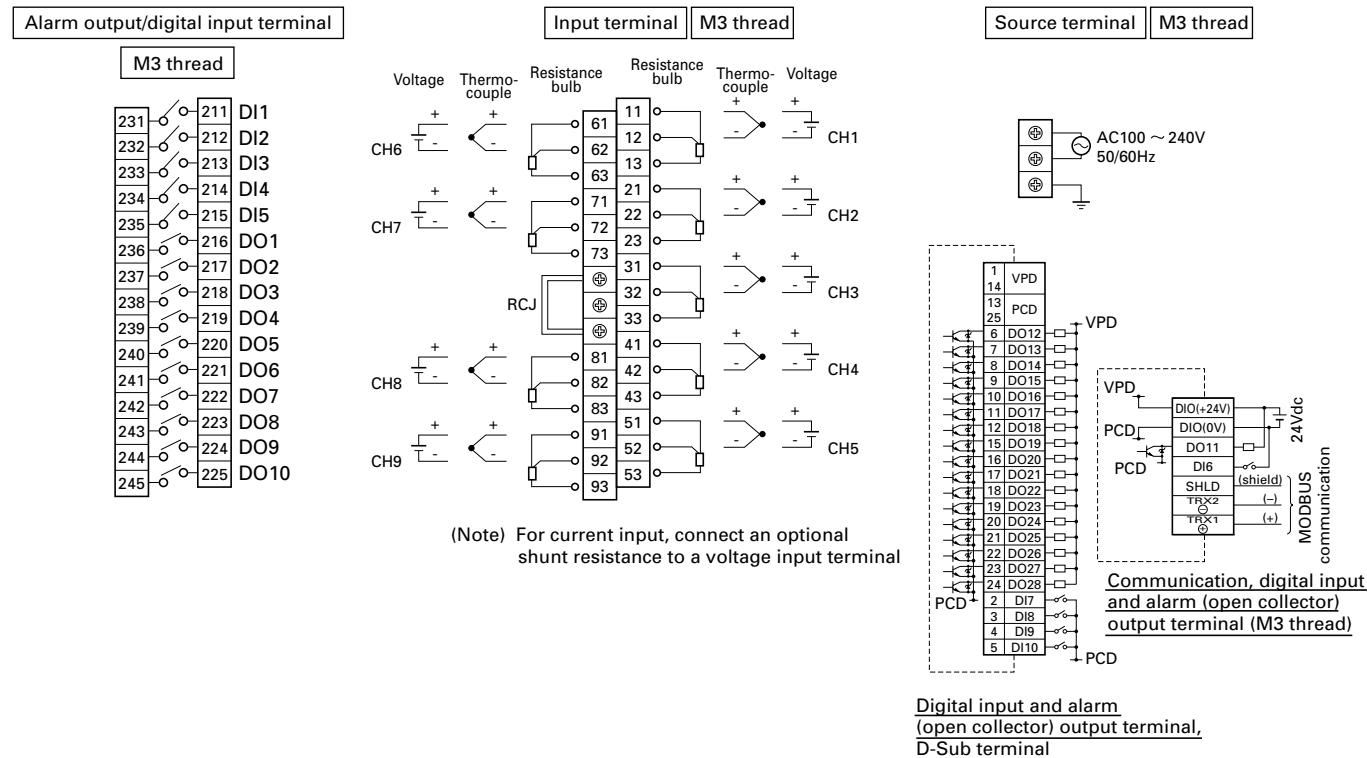

In the case of 18-point input

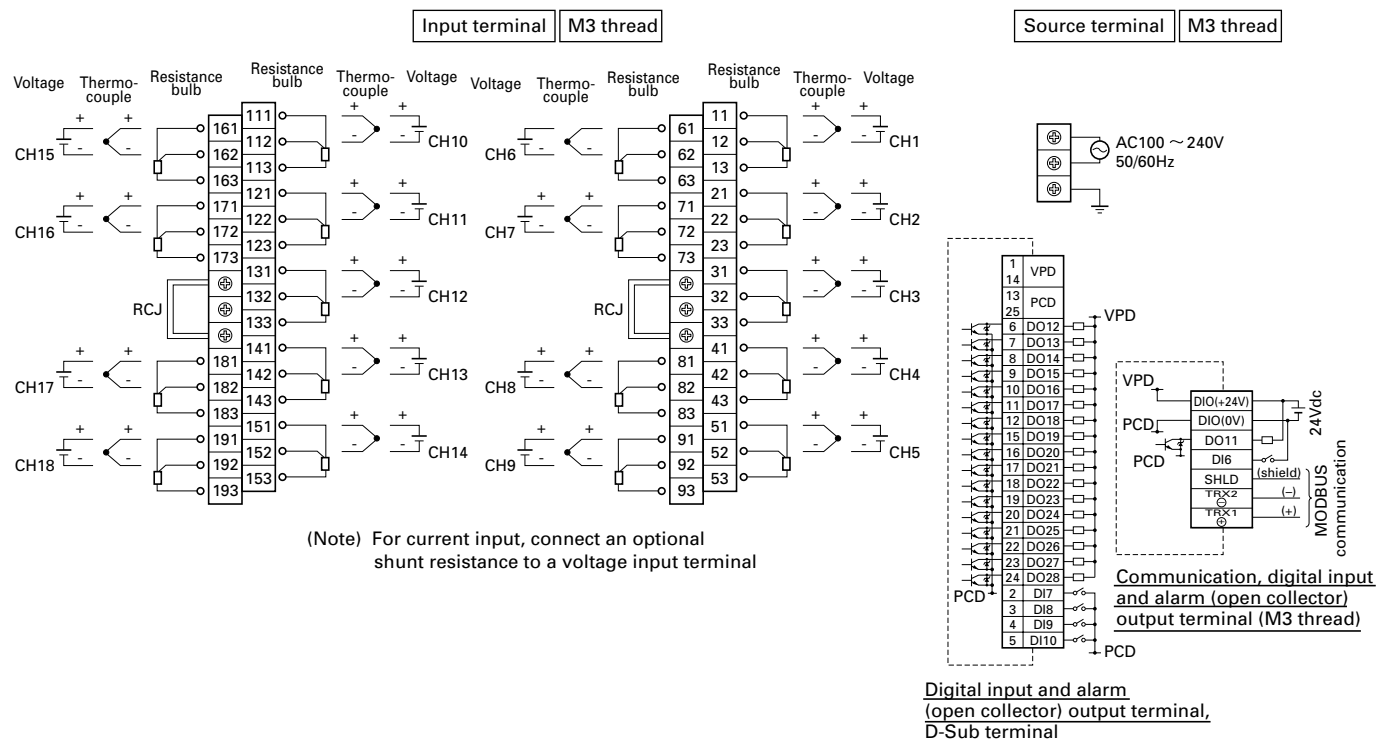


PORTABLE (TABLE TOP) TYPE

In the case of 9-point input


Alarm output/digital input terminal

M3 thread

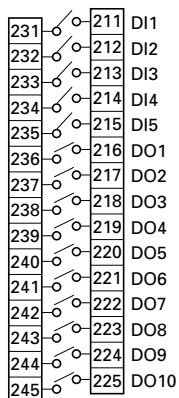



Input terminal

M3 thread

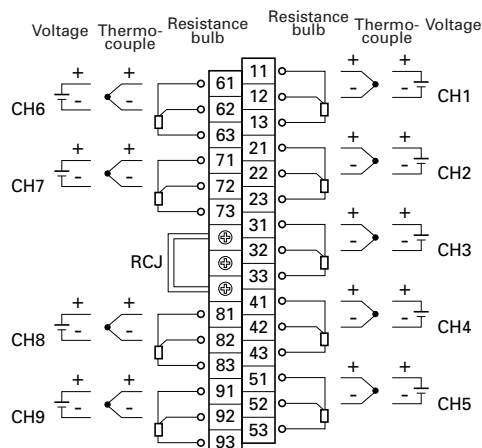

(Note) For current input, connect an optional shunt resistance to a voltage input terminal

Source terminal (Inlet)

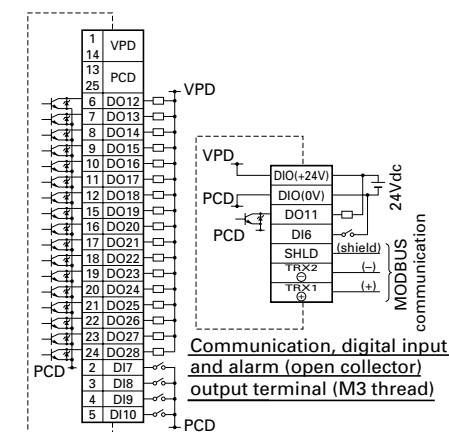


Digital input and alarm (open collector) output terminal, D-Sub terminal

In the case of 18-point input



Input terminal

M3 thread

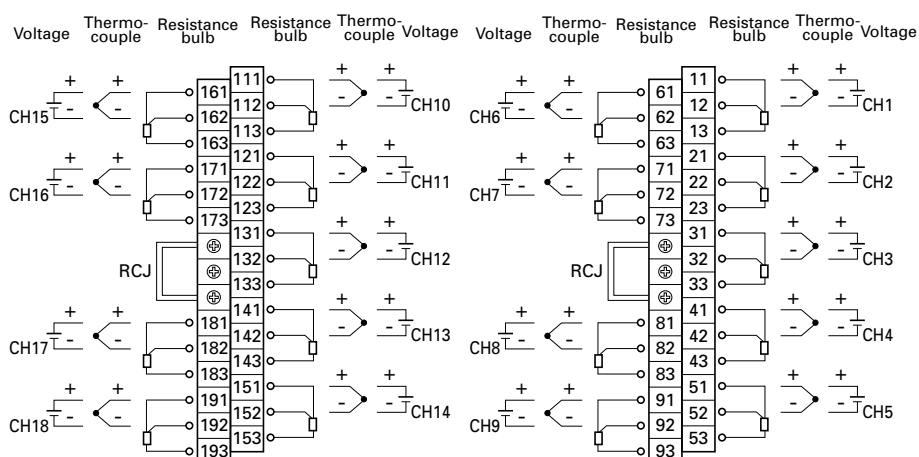

(Note) For current input, connect an optional shunt resistance to a voltage input terminal

Source terminal (Inlet)

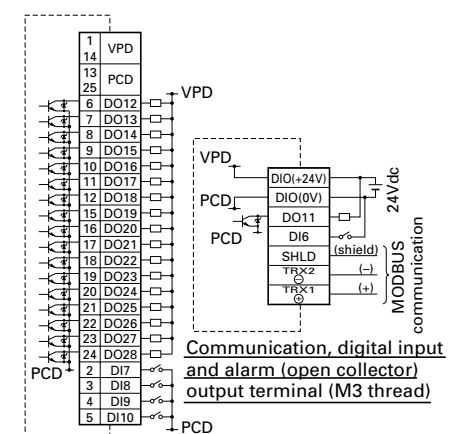

Digital input and alarm (open collector) output terminal, D-Sub terminal

SELECTING INPUT TYPE

The input type is the same every 2 channels.

The input type of channel 2, 4, 6, 8, 11, 13, 15 and 17 can only be set in the same category of previous channel.

The following input types are available.

Input type	Details
Thermocouple, 50mV	K, E, J, T, R, S, B, N, W, L, U, and PN thermocouples, 50mV
Resistance bulb	Pt100, JPt100
500mV	500mV
5V	1 to 5V, 0 to 5V
Other channels	Other channels (*1)

Note, however, that input type can be arbitrarily selected only for channels 9 and 18 irrespective of the type allocated to other channels.

*1: Used for F value calculation, for example. If an input type is allocated to another channel, or, if the input type of channel 2 is allocated to other channels and several settings are made when the temperature is being measured by connecting K thermocouple to channel 1, it is possible to display a temperature measured by K thermocouple on channel 2. F value calculation is available on channel 1, and the temperature recording is available on channel 2.

For setting method, refer to the instruction manual.

Example of channel input type selection

	Input type	Input type	Description
Channel 1	K thermocouple	Thermocouple, 50mV	The type of thermocouple can be arbitrarily selected for each channel.
Channel 2	T thermocouple		
Channel 3	1-5V	5V	
Channel 4	0-5V		
Channel 5	Pt100	Resistance bulb	The type of resistance bulb can be arbitrarily selected for each channel.
Channel 6	JPt100		
Channel 7	500mV	500mV	
Channel 8	500mV		
Channel 9	J thermocouple	Thermocouple, 50mV	Input type can be arbitrarily selected for channel 9.
Channel 10	K thermocouple	Thermocouple, 50mV	The input type of the thermocouple and 50mV is the same.
Channel 11	50mV		
Channel 12	Skip	5V	Skip and other channel can arbitrarily be selected irrespective of the input type.
Channel 13	1-5V		
Channel 14	Pt100	Resistance bulb	
Channel 15	Skip		
Channel 16	Other channels	500mV	
Channel 17	500mV		
Channel 18	50mV	Thermocouple, 50mV	Input type can be arbitrarily selected for channel 18.

Note 1) Windows2000/XP, Excel, and Internet Explorer are the trademarks or registered trademarks of Microsoft Corporation in the U.S.

Note 2) CompactFlash is a trademark or registered trademark of Sandisk Corporation.

Note 3) Modbus is the trademark or registered trademark of AEG Schneider Automation International.

Note 4) The PC98 Series is the trademark or registered trademark of NEC Corporation.

Note 5) Netscape is the trademark or registered trademark of Netscape Communications Corp.

Caution on Safety

*Before using this product, be sure to read its instruction manual in advance.

Fuji Electric Systems Co., Ltd.

Head Office

Gate City Ohsaki, East Tower, 11-2, Osaki 1-chome,
Shinagawa-ku, Tokyo 141-0032, Japan

<http://www.fesys.co.jp/eng>

Instrumentation Div.

International Sales Dept.

No.1, Fuji-machi, Hino-city, Tokyo, 191-8502 Japan

Phone: 81-42-585-6201, 6202 Fax: 81-42-585-6187

<http://www.fic-net.jp/eng>

Information in this catalog is subject to change without notice.

Printed in Japan